


PO BOX 2489 SALISBURY, NC 28145 TOLL FREE: 800-617-7125

WOOD BACKED WALL PAD

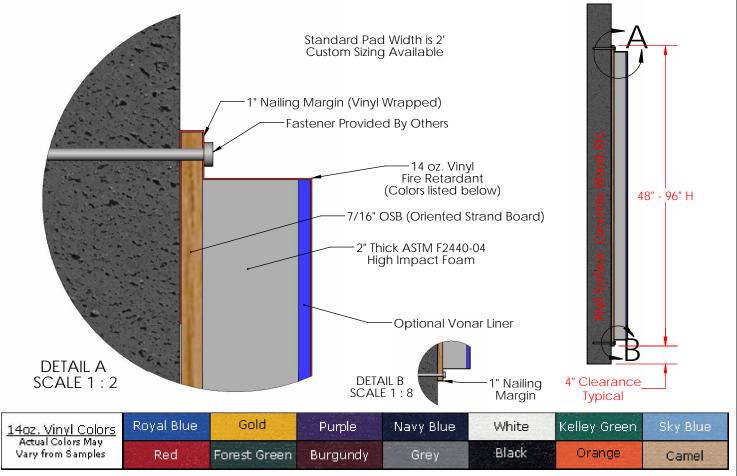

Specifications:

Interior Use

Application: Masonry, Wood Wall or Drywall

Backing: 7/16" OSB (Oriented Strand Board)

Foam Core: 2" THICK ASTM F2440-04 High Impact Foam; Optional 1/4" Vonar Fire Interliner available

Vinyl Covering: 14 oz. Vinyl, Leather Grain appearance, 1300 Denier Polyester Base Fabric, Tear Strength: 93 x 83, Strip Tensile: 365 x 348, Anti-fungal, Flame Resistant: Class A. Colors per manufacturer's standard selection, as selected by Architect. Vinyl cover is wrapped around the backside of the wood and stapled every 3" with galvanized steel staples.

Attachment: 1" Nailing Margin at top and bottom of pad, allows it to be mounted to wall with the appropriate wood, drywall, or masonry fasteners provided by others.

Not To Scale

WCHI - WOOD BACKED WALL PAD WITH I" NAILING MARGIN AT TOP AND BOTTOM

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED
IN THIS DOCUMENT IS THE
SOLE PROPERTY OF
PROMATS® ATHLETICS AND
ANY REPRODUCTION IN PART
OR WHOLE WITHOUT WRITTEN
PERMISSION IS PROHIBITED

Promats® Athletics 02062015

Meets all emissions criteria for

Greenguard Children & Schools Certification