


CLASS A (ASTM E-84) COMPLIANT

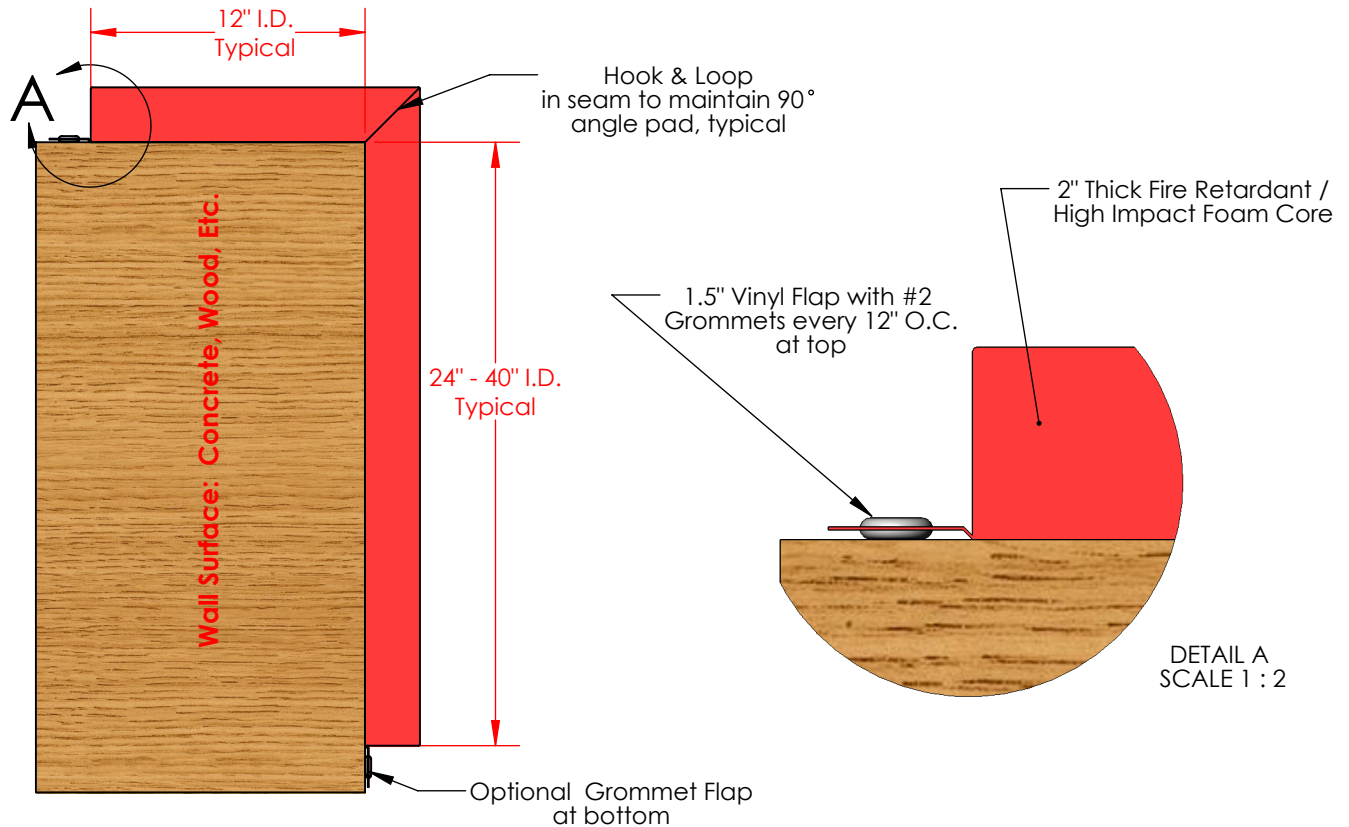

14oz. Vinyl Colors Actual Colors May Vary from Samples	Royal Blue	Gold	Purple	Navy Blue	White	Kelley Green	Sky Blue
	Red	Forest Green	Burgundy	Grey	Black	Orange	Camel

Specifications:

Interior Use

Application: Masonry, Wood Wall or Drywall

Foam Core: 2" thick Medium Density Class A Fire Rated Foam

Vinyl Covering: 14 oz. Vinyl, Leather Grain appearance, 1000 Denier Polyester Base Fabric, Tear Strength: 93 x 83, Strip Tensile: 365 x 348, Anti-fungal, Flame Resistant: Class A. Colors per manufacturer's standard selection, as selected by Architect. Vinyl cover is stitched using 6 lbs. bonded polyester black thread.

Attachment: 1.5" Vinyl flaps with #2 grommets every 12" O.C. at top allow the pad to be mounted to the wall with the appropriate wood, drywall, or masonry fasteners provided by others.

Sports Specialties Fire-Retardant padding assembly meets the requirements of NFPA 101 Life Safety Code for Class A rating (Flame Spread 0-25, Smoke Development 0-450) when tested in accordance with ASTM-E84.



Meets all emissions criteria for Greenguard Children & Schools Certification

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF SPORTSFIELD SPECIALTIES, INC. AND ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED

SMGFR - Fire Rated Stage Mat

Not To Scale

Sportsfield Specialties 02062015